


Trafficable surface over insulated roof

DETAIL SHEET 11

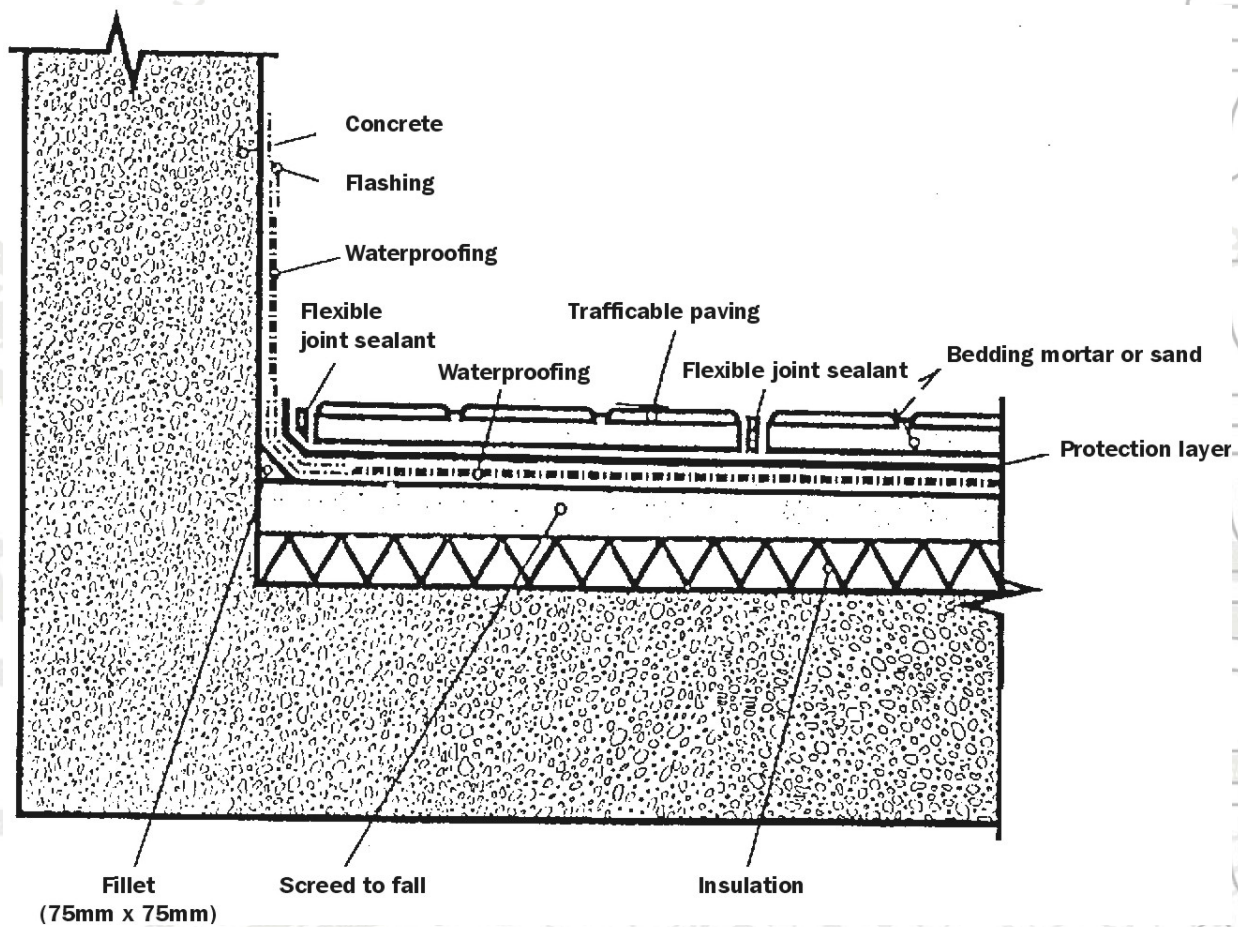

Notes:

- 1 The flashing system indicated above may vary depending on the waterproofing system employed.
- 2 The trafficable surface is to have sufficient expansion joints to enable it to cope with the expected expansion and contraction (refer to SABS Code of practice – 021) eg. Expansion joints at 3m intervals.
- 3 When specifying the waterproofing system both its compatibility and co-efficient of expansion must be taken into consideration.
- 4 It is advisable to inspect the waterproofing system prior to the installation of the trafficable surface to prevent damage from going unnoticed.
- 5 The insulation material to be used must be given carefull consideration to ensure that it will meet all requirements eg. Point loading, water absorption etc.